

偉鵬機械有限公司 (台資企業)

地址 江蘇省儀徵市馬集鎮八里工業集中區

電話 0514-8366 5988

郵編 211414

傳真 0514-8366 6448

郵箱 sales@weipong.com

WEIPONG MACHINERY
CO.,LTD. (TAIWAN)

Add Bali Industry Area, Maji Town, Yizheng City, Jiangsu province, China (211414)

Tel 86 514 83665988

E-mail sales@weipong.com

Fax 86 514 83666448

www.weipong.com



WEIPONG MACHINERY

DESCRIPTION	FOUR COLORS FLEXO PRINTER WITH STRIPPING STACKER, BOTTOM PRINTING / TOP VACUUM TRANSFER, DOCTOR BLADE INKING SYSTEM, CERAMIC ANILOX ROLLER, DOUBLE SHAFTS SLOTTING UNIT / TOP DIE CUT, ADVANCED STRIPPING STACKER (BUNDLE+PILE), OPEN/CLOSE TYPE
MODEL	VENUS-1627 SSTK-B
SIZE	1600x2700 MM





MAIN TECHNICAL SPECIFICATIONS: (MODEL: VENUS-1627 SSTK-B):

<u>ITEM</u>	<u>DESCRIPTION</u>	<u>QTY</u>
1	<p>LEAD EDGE FEEDER:</p> <ul style="list-style-type: none"> ✚ FOUR WHEELS SHAFT DESIGN. ✚ INTERNET ONLINE SERVICE SUPPORT. ✚ VACUUM DUSTPROOF SYSTEM. ✚ SKIP FEEDING. 	1
2	<p>PRINTING UNIT:</p> <ul style="list-style-type: none"> ✚ OPEN/CLOSE TYPE. ✚ BOTTOM PRINTING. ✚ CERAMIC ANILOX ROLLER. ✚ TOP VACUUM TRANSFER. ✚ DOCTOR BLADE INKING SYSTEM. <p>OPTION:</p> <ul style="list-style-type: none"> ✓ INK MIXERS ✓ VACUUM SHEET TRANSFER UNIT WITH IR OR HOT AIR DRYERS 	4
3	<p>SLOTING UNIT:</p> <ul style="list-style-type: none"> ✚ PRECREASING SHAFT. ✚ DOUBLE SLOTTING SHAFTS. ✚ CREASERS/ SCORING SHAFTS. ✚ CENTRAL KNIFE IS FIXED TYPE. ✚ PRECREASING, CREASINF AND SLOTTING POSITIONS ARE ALL IN UNITED MOVEMENTS. <p>OPTION:</p> <ul style="list-style-type: none"> ✓ SWING KNIVES FUNCTION TO SAVE ORDER CHANGE TIME ✓ INDEPENDENT CREASING UNIT 	1
4	<p>ROTARY DIE CUTTING UNIT:</p> <ul style="list-style-type: none"> ✚ TOP DIE CUTIING MODE. ✚ WITH SYNC. DRIVE: <ul style="list-style-type: none"> ✓ ANVIL ROLLER IS SERVO DRIVEN. ✓ DIE ROLLER IS GEAR DRIVEN. ✚ DIE FIXATION IS WITH SCREW FIXED, PULL RING IS WITH MOTORIZED ADJUSTMENT. ✚ ANVIL GRINDING SYSTEM. 	1




	<p>OPTION:</p> <p>✓ SERVO DIRECT DRIVE</p>	
5	<p>ADVANCED STRIPPING STACKER (BUNDLE+PILE):</p> <ul style="list-style-type: none"> ✚ DIE CUTTING JOBS CAN BE DONE IN ONE SHEET OR MULTIPLE SHEETS OUT. ✚ EXCELLENT STRIPPING EFFECT. ✚ COUNTER EJECTOR STACKER FOR BUNDLES. ✚ COUNTER STACKER FOR HIGH PILES. ✚ FULLY COMPUTERIZED CONTROL SYSTEM. <p>OPTION:</p> <p>✓ PALLET INSERTER CONVEYOR SYSTEM</p>	1
6	<p>CENTRAL COMPUTER MANAGEMENT SYSTEM CAN BE CONNECTED WITH ERP SYSTEM TO SCHEDULE ALL ORDERS EXTERNALLY</p>	
7	<p>COMPUTER CONTROL SYSTEM:</p> <ul style="list-style-type: none"> ✚ TOUCH SCREENS DISPLAY AND CONTROL FOR EACH UNIT. 	



MACHINE SPECIFICATIONS:

Technical Data (MM)		Model	VENUS-1627 SSTK-B
Max. Sheet Length(A)	MAX		2700
	MIN		600
Max. Sheet Width(F)	Continuous Feed		1600
	Skip Feed		2000
Min. Sheet Width(F)			450
Max. Print Area (Mathew system)			1600x2600
Max. Print Area (mounting plate)			1570x2600
Min. Slotter gap	Reverse direction-mm	MIN(B)	240
		MIN(C)	70
	Normal direction-mm	MIN	135
Box Height	MIN(E)		90
Glue Lap Width(D)			50
Max. Machine Speed	(BOX/H)		10,000
Board Thickness			1.5-9
Color process precision			±0.5

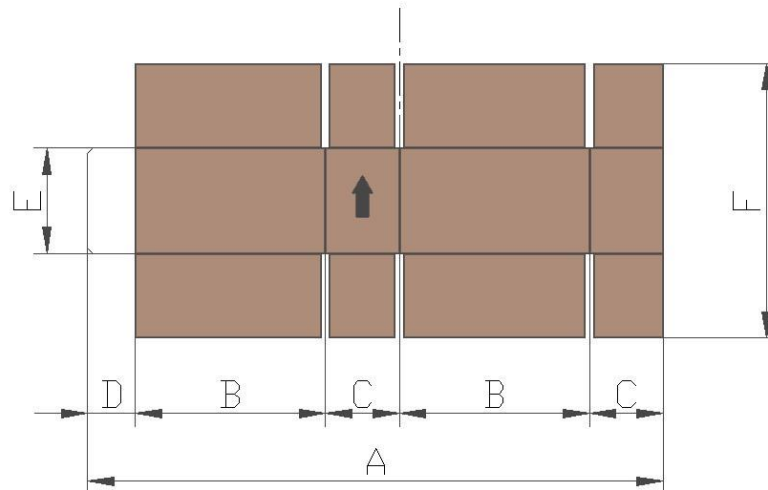

**** All data is for reference only, not a contract value.**

****Speed varies according to the sheet quality, sheets sizes, running conditions,...etc.**

**** We have the right to change the specification for improvement use or the brand with the same level. without further notice.**